

Thermoplastic Elastomer 60° Shore A
Thermoplastic Elastomer 40° D Shore A

<u>60° Shore A</u>	ASTM D 2240
- Density: 0,98 g/cm ³	ASTM D 792
- Pull Strength: 5,0 N/mm ²	ASTM D 412
- Tear stretch: 600%	ASTM D 412
- Tear force: 2,0 N/mm ²	ASTM D 412
- Pressure deformation rest: 21% (22h / 23°C)	ASTM D 395
- Pressure deformation rest: 31% (22h / 70°C)	ASTM D 395


<u>40° D Shore A</u>	ASTM D 2240
- Density: 0,90 g/cm ³	ASTM D 792
- Pull Strength: 17,0 N/mm ²	ASTM D 412
- Tear stretch: 700%	ASTM D 412
- Tear force: 8,1 N/mm ²	ASTM D 412
- Pressure deformation rest: 38% (22h / 23°C)	ASTM D 395
- Pressure deformation rest: 55% (22h / 70°C)	ASTM D 395

Working Temperature:
-10° to +55° C

- Physical Characteristics**
- Color stability
 - UV Resistant
 - Ozone Resistant
 - Smoke barrier complying EN 1634-3

Paint Compatibility:
The material used in DEVENTER SV quality is compatible with thinned acrylic paints and alkyd resin paints containing conventional solvents. Paint and coatings, of which the properties are unknown must be tested for compatibility in contact with the weather seals.

SV 2

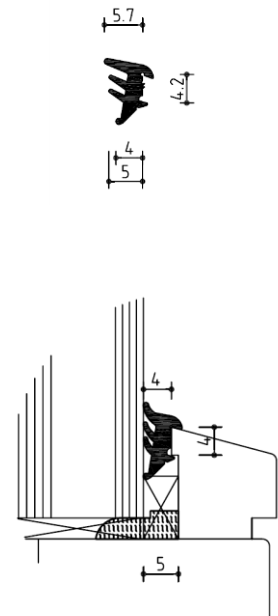

Available colors



Management System
ISO 9001:2008

www.tuv.com
ID 1100005114