


DEVENTER
weather seals

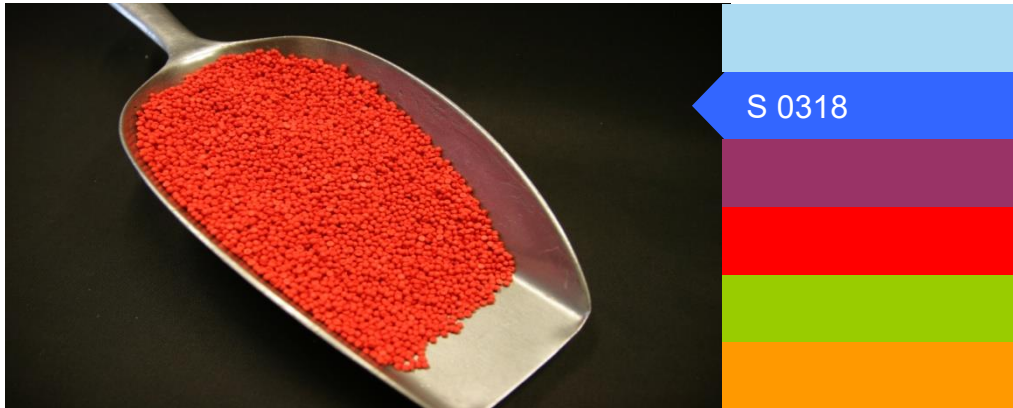

Thermoplastic Elastomer 63° Shore A

63° Shore A

- | | |
|---|---------------|
| - Density: 1.14 g/cm ³ | EN ISO 868 |
| - Pull Strength: 9,0 N/mm ² | EN ISO 1183-1 |
| - Tear stretch: 930% | ISO 37 |
| - Tear force: 2,0 N/mm ² | ISO 37 |
| - Pressure deformation rest: 22% (24h / 23°C) | ISO 815 |
| - Pressure deformation rest: 26% (72h / 23°C) | ISO 815 |
| - Pressure deformation rest: 43% (24h / 70°C) | ISO 815 |

Working Temperature:

-10° to +55° C


Physical Characteristics

- Color stability
- UV Resistant
- Ozone Resistant
- Smoke barrier complying EN 1634-3

Paint Compatibility:

The material used in DEVENTER S quality is compatible with thinned acrylic paints and alkyd resin paints containing conventional solvents. Paint and coatings, of which the properties are unknown must be tested for compatibility in contact with the weather seals.

S 0318



Available colors



Management System
ISO 9001:2008

www.tuv.com
ID 1100005114