FabGFix Door Handles

Windsor Inline Lever Lever



Features

- Solid die cast construction with heavy duty spring cassette Sturdy feel and consistent 90 degree lever return
- ٠ Compact baseplate with screws in close proximity Combats lever attack
- Sculpted ergonomic lever and low friction nylon bush Easy to grip and smooth action
- Supplied with screw and spindle pack to suit 60-70mm profiles Everything needed for installation included
- Colour coordinated screw heads Perfectly matching hardware, even down to the smallest details
- Baseplate in common with all Windsor handles Same routing detail regardless of product variant chosen
- ٠ Wide backplate To suit cylinder guards and accommodate larger cylinder preparation
- Supplied with care instructions Helps the homeowner to keep the hardware in optimal condition
- Supplied fully assembled Simple and quick installation, no need to fit springs or lever
- Each part packaged in a separate chamber, but supplied as a set No scratching of parts during transit







EXTERNAL DOORS









Anthracite Grey

Hardex Chrome



Hardex Bronze

Hardex Gold





Hardex Rose



Graphite



Antique Black

Hardex Pewter



Fablic Fix Door Handles

Windsor Inline Lever Lever

| Ordering Details Product | | |
|-----------------------------|-----------|--|
| | | |
| Finish | Part No. | |
| Hardex Chrome | 1F001 | |
| Hardex Satin | 1F002 | |
| Hardex Bronze | 1F003 | |
| Hardex Gold | 1F005 | |
| Hardex Graphite | 1F008 | |
| Hardex Pewter | 1F009 | |
| Hardex Rose | DHAWRHRIL | |
| Antique Black | 1F006 | |
| Anthracite Grey | 1B005 | |
| White | 1B000 | |
| Black | 1B001 | |
| Silver | 1B002 | |

For additional part numbers please contact our sales office.

Technical Information

| Corrosion resistance Meets the requirements of BS EN 1670:2007 Grade 5 (480 hours) | |
|---|--|
| Operation Endurance tested in excess of 200,000 cycles | |
| Performance Tested to meet the requirements of PAS 24 as part of a compliant door set | |
| Material Specification | |
| Handle Grip and Backplate: | High quality Zinc for all Hardex finishes and Antique Black. High quality Aluminium for White, Black, Anthracite Grey and Silver finishes. |
| Coatings: | Hardex Chrome, Hardex Satin, Hardex Bronze, Hardex Gold, Hardex Graphite, Hardex Pewter, Hardex Rose, Antique Black, Anthracite Grey, White, Black and Silver. |
| Spindle / Screws: | Machine screws with colour coordinated heads for handle. 60mm - 70mm profiles (1 x 8mm x 120mm spindle; 2 x M5 x 70mm and 2x M5 x 80mm screws) |
| Cylinder: | Euro Cylinder, 92mm PZ |


Maintenance

For continued protection of the quality finish and appearance, Fab&Fix advise routine cleaning of all our external hardware. Moving parts should also be lightly lubricated at least twice a year. This procedure is particularly essential if products are used within a 25-mile radius of coastal areas or close proximity to building sites or large industrial areas, where more frequent cleaning may be required to prevent the accumulation of corrosive contaminants.

Packaging

Handles

Individually bagged with screws, spindle and care instructions. 15 handles in an outer box.

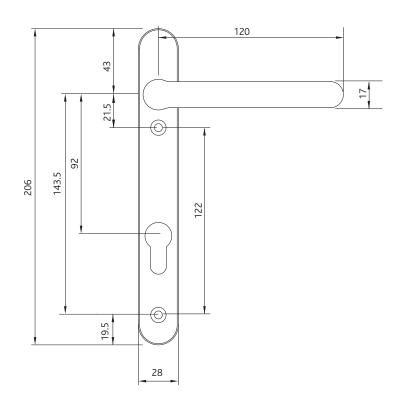

EXTERNAL DOORS

All dimensions are in mm and are nominal. Fab&Fix reserves the right to change specification without notice It is the responsibility of the door manufacturer to ensure that the finished product meets any required safety and performance specification.